


Signaling Access/Aggregation in voice Networks

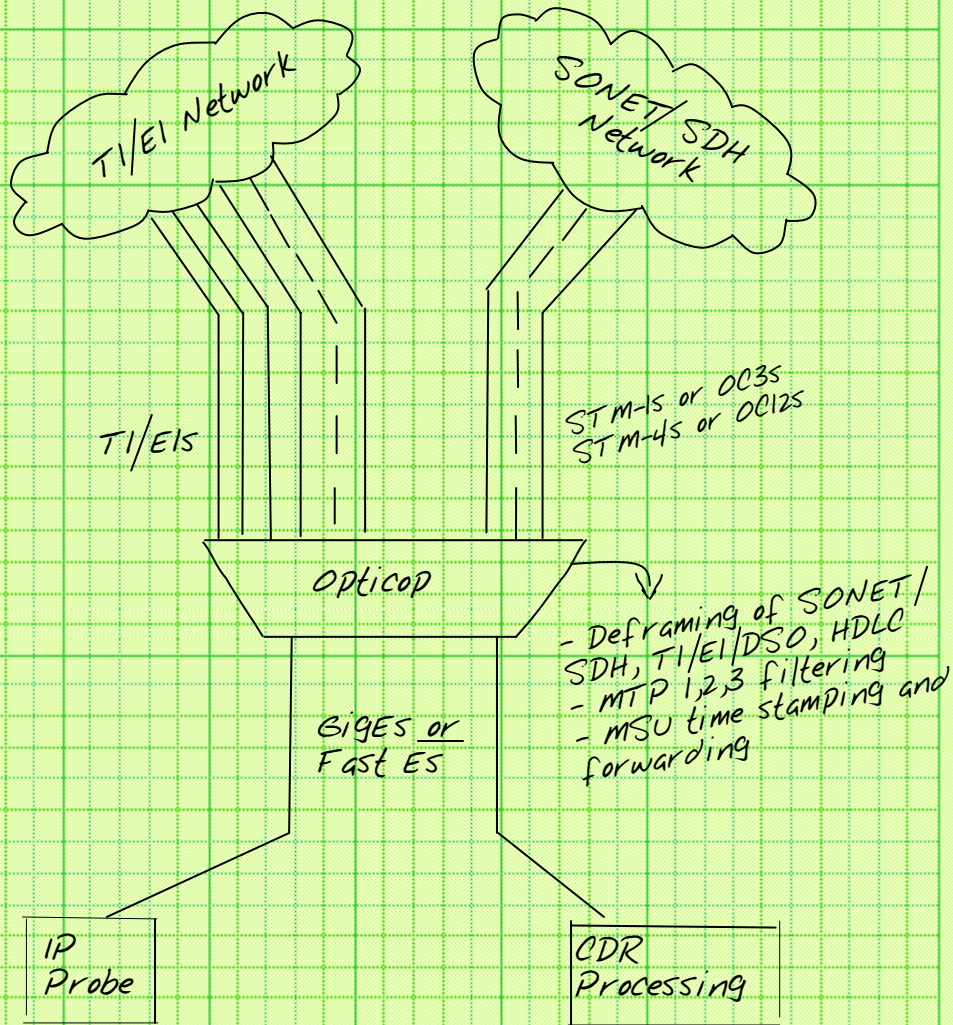

OptiCop accesses and monitors a high number of Copper/Optical T1/E1S and extracts/processes up to 2048 concurrent SST sessions. Selected MSU types (for example SCCP, TUP and ISUP messages) are forwarded to GIGE or Fast Ethernet outputs for processing by higher level applications.